


# Square Bore Agricultural Bearing Dimensions



Part No.	Type	Unit of Measurement	d	A	D	Be	Bi	Dynamic	Static	Wt. Lbs.
W208PP5	4	Inch	1 1/8	1.18	3.1496	0.709	1.438	7340	3650	1.5
		mm	28.575	29.97	80	18	36.52			
W208PPB5	1	Inch	1 1/8	1.18	3.1496	0.709	1.438	7340	3650	1.47
		mm	28.575	29.97	80	18	36.52			
W208PP6	4	Inch	1	1.03	3.1496	0.709	1.438	7340	3650	1.62
		mm	25.4	26.162	80	18	36.52			
W208PP8	4	Inch	1 1/8	1.18	3.1496	1.188	1.438	7340	3650	1.66
		mm	28.575	29.972	80	30.175	36.52			
W208PPB8	2	Inch	1 1/8	1.18	3.1496	1.188	1.438	7340	3650	1.66
		mm	28.575	29.972	80	30.175	36.52			
W208PP9	2	Inch	1	1.03	3.1496	1.188	1.438	7340	3650	1.74
		mm	25.4	26.162	80	30.175	36.			
W208PPB12	6	Inch	1 1/8	1.18	3.376	1.188	1.438	7340	3650	1.62
		mm	28.575	29.972	85.75	30.175	36.52			
W208PPB13	1	Inch	7/8	0.905	3.1496	0.709	1.438	7340	3650	1.62
		mm	22.225	23	80	18	36.52			
W208PP20	1	Inch	1 1/8	1.18	3.1496	0.709	1.438	7340	3650	1.47
		mm	28.575	29.97	80	18	36.52			
W209PPB5	2	Inch	1 1/4	1.29	3.3465	1.188	1.438	7350	4150	1.75
		mm	31.75	32.766	85	30.175	36.52			
W210PP4	5	Inch	1 1/8	1.18	3.5433	1.188	1.188	7880	4650	1.92
		mm	28.575	29.972	90	30.175	30.15			
W210PPB4	3	Inch	1 1/8	1.18	3.5433	1.188	1.188	7880	4650	2.11
		mm	28.575	29.972	90	30.175	30.175			
W210PPB6	2	Inch	1 1/8	1.18	3.5433	1.188	1.438	7880	4650	2.11
		mm	28.575	29.972	90	30.175	36.52			

# Square Bore Agricultural Bearing Dimensions

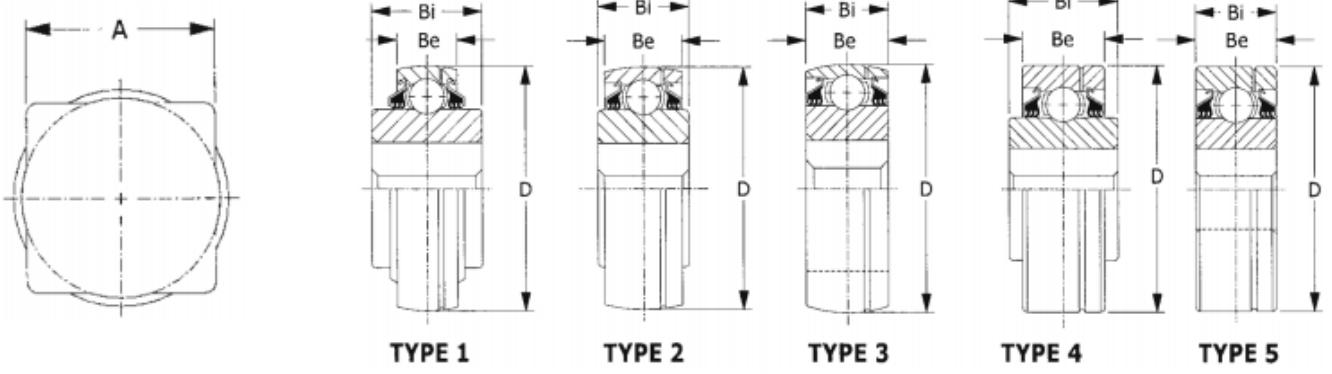

Part No.	Type	Unit of Measurement	d	A	D	Be	Bi	Dynamic	Static	Wt. Lbs.
W211PP3	5	Inch	1 1/2	1.5311	3.937	1.312	1.312	9740	5850	2.79
		mm	38.1	38.89	100	33.324	33.324			
W211PPB3	3	Inch	1 1/2	1.5311	3.937	1.312	1.312	9740	5850	2.66
		mm	38.1	38.89	100	33.324	33.324			
W211PP5	4	Inch	1 1/2	1.5311	4	1.438	1.75	9740	5850	3.38
		mm	38.1	38.89	101.6	36.52	44.45			
W211PPB6	6	Inch	1 1/2	1.5311	4.077	1.438	1.75	9740	5850	4.05
		mm	38.1	38.89	103.556	36.52	44.45			
W211PP29	1	Inch	1.575		4.077	0.984	1.313	9740	5850	4.05
		mm	40		103.556	25	33.34			
W211PP30	5	Inch	1.575		4.077	1.313	1.313	9740	5850	4.05
		mm	40		103.556	33.34	33.34			
W211PPB30	3	Inch	1.575		4.077	1.313	1.313	9740	5850	4.05
		mm	40		103.556	33.34	33.34			
W211PP34	4	Inch	1.575		4	1.438	1.75	9740	5850	4.05
		mm								

Part No.	Type	Unit of Measurement	d	A	D	Be	Bi	Dynamic	Static	Wt. Lbs.
GW208PP17	4	Inch	1 1/8	1.18	3.3755	1.188	1.438	7340	3650	2.04
		mm	28.575	29.972	85.738	30.175	36.525			
GW211PP17	4	Inch	1 1/2	1.5311	3.937	1.312	1.75	9740	5850	2.62
		mm	38.1	38.89	100	33.325	44.45			
GW211PPB29	4	Inch	1 1/2	1.574	4.077	0.984	1.313	9740	5850	4.05
		mm	38.1	40	103.556	25	33.34			
GW211PP35	4	Inch	1 1/2	1.574	3.937	1.313	1.75	9740	5850	4.05
		mm	38.1	40	100	33.34	44.45			
GW211PPB50	1	Inch	1 3/4	1.574	3.937	1.313	2.005	9740	5850	4.05
		mm	44.45	40	100	33.34	50.95			
GW214PPB4	3	Inch	2	2.0551	4.9213	1.562	1.562	14000	8800	4.75
		mm	50.8	125	39.675	39.675				
GW216PP2	4	Inch	2 1/4	2.315	5.5118	1.181	2.5	16280	10400	6.32
		mm	57.15	58.8	140	30	63.5			
GW216PPB2	1	Inch	2 1/4	2.315	5.5118	1.181	2.5	16280	10400	6.32
		mm	57.15	58.8	140	30	63.5			
GW216PPB4	1	Inch	2 1/4	2.315	5.5118	1.181	2.5	16280	10400	6.32
		mm	57.15	58.8	140	30	63.5			