
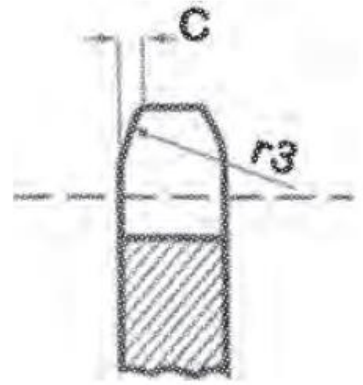


# 06B-1-2 Sprocket Product Dimension

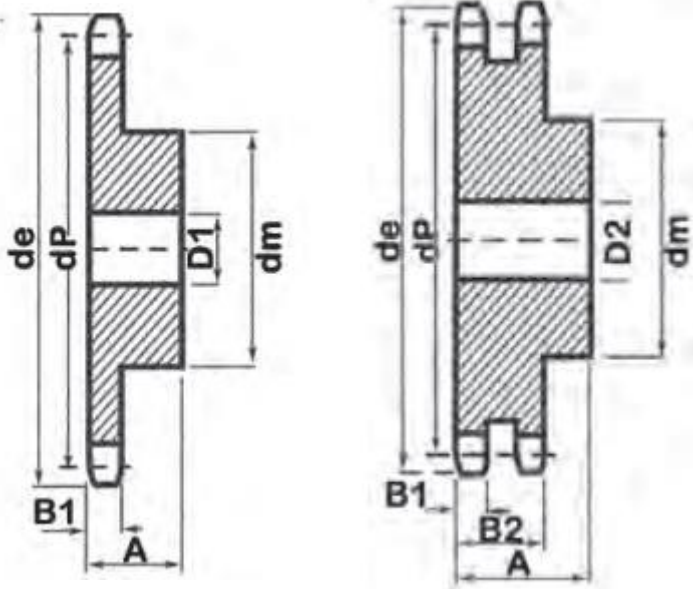

Teeth	de	dp	Simplex			Duplex			
			dm	D1	A	dm	D2	A	App. Kg
8	28.6	24.89	15	8	20	0.03	-	-	-
9	31.5	27.85	18	8	20	0.04	18	8	25 OA
10	34.5	30.82	20	8	20	0.06	20	8	25
11	37.5	33.8	22	8	25	0.09	22	10	30
12	40.5	36.8	25	8	25	0.1	25	10	30
13	43.5	39.8	28	8	25	0.11	28	10	30
14	46.5	42.8	31	8	25	0.12	31	10	30
15	49.5	45.81	34	8	25	0.14	34	10	30
16	52.5	48.82	37	10	28	0.18	37	12	30
17	55.5	51.83	40	10	28	0.2	40	12	30
18	58.6	54.85	43	10	28	0.23	43	12	30
19	61.6	57.87	45	10	28	0.25	46	12	30
20	64.6	60.89	46	10	28	0.31	49	12	30
21	67.6	63.91	48	12	28	0.36	52	16	30
22	70.6	66.93	50	12	28	0.37	55	16	30
23	73.7	69.95	52	12	28	0.39	58	16	30
24	76.7	72.97	54	12	28	0.4	61	16	30
25	79.7	76	57	12	28	0.41	64	16	30
26	82.7	79.02	60	12	28	0.42	67	16	30
27	85.7	82.04	60	12	28	0.44	70	16	30
28	88.8	85.07	60	12	28	0.45	73	16	30
29	91.8	88.09	60	12	28	0.47	76	16	30
30	94.8	91.12	60	12	28	0.48	79	16	30
31	97.9	94.15	65	14	30	0.51	-	-	-
32	100.9	97.17	65	14	30	0.56	-	-	-
33	103.9	100.2	65	14	30	0.62	-	-	-
34	106.9	103.2	65	14	30	0.66	-	-	-
35	110	106.3	65	14	30	0.68	-	-	-
36	113	109.3	70	16	30	0.71	-	-	-
37	116	112.3	70	16	30	0.74	-	-	-
38	119	115.3	70	16	30	0.77	90	16	30
39	122.1	118.4	70	16	30	0.79	-	-	-
40	125.1	121.4	70	16	30	0.81	-	-	-
45	140.2	136.5	75	16	30	0.91	90	19	35
48	149.7	145.6	75	16	30	0.9	20	35	
57	176.6	172.9	75	19	30	1.27	90	20	35
76	234.2	230.5	75	19	30	1.91	90	20	38
95	291.8	288.1	75	19	30	2.61	95	25	38
114	349.4	345.7	75	19	30	3.63	95	25	38

Pinions	mm
Tooth Radius	r3
Radius Width	C
Tooth Width	B1 5.3
Tooth Width	b1
Tooth Width	B2 15.4

Chain	mm
Pitch	9.53
Inside	5.72
Roller	ø 6.35