
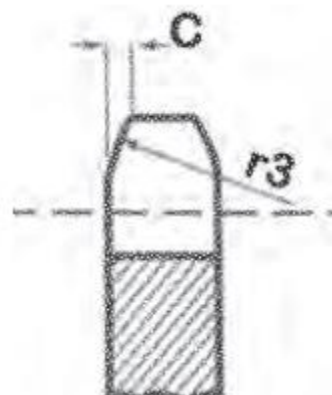
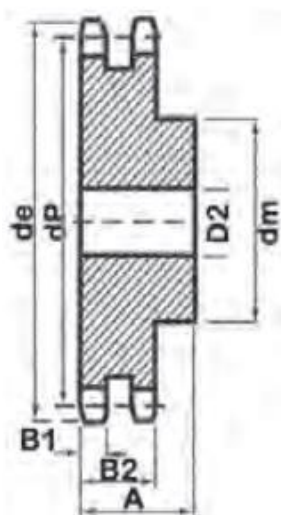


24B Pilot Bore Sprocket Product Dimension

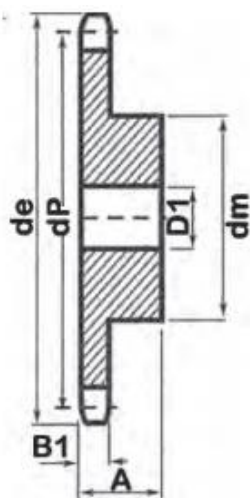

24B-1-2-3 Sprockets

Teeth	Simplex					Duplex				
	de	dp	dm	D1	A	App. Kg	dm	D2	A	App. Kg
9	125	111.4	70	25	95	2.02	-	-	-	-
10	137	123.3	80	25	95	2.61	-	-	-	-
11	149	135.2	90	25	100	3.77	90	25	100	6.5
12	161	147.2	102	25	100	4.77	102	25	100	8.21
13	137	159.2	114	25	100	5.91	114	25	100	9.92
14	185	171.2	128	25	100	6.68	128	25	100	11.98
15	197	183.3	132	25	100	7.49	132	25	100	14.13
16	209	195.3	136	30	100	9.08	136	30	100	16.35
17	221	207.3	136	30	100	9.76	136	30	100	17.85
18	233	219.4	160	30	100	10.49	160	30	100	20.35
19	245.5	231.5	160	30	100	11.21	160	30	100	22.56
20	257.5	243.6	160	30	100	12.26	160	30	100	24.78
21	270.5	255.7	160	30	100	13.38	160	30	100	26.99
22	282.5	267.7	160	30	100	13.67	160	30	100	29.74
23	294.5	279.8	160	30	100	14.74	160	30	100	29.48
24	307	292	160	30	100	15.56	160	30	100	31.12
25	319	304	160	30	100	16.38	160	30	100	32.76
26	331	317	160	30	100	28.53	160	30	100	57.06
27	343	328	160	30	100	29.52	160	30	100	59.04
28	355	340	160	30	100	30.6	160	30	100	61.2
29	367	352	160	30	100	31.68	160	30	100	63.36
30	379	365	160	30	100	32.85	160	30	100	65.7

Pinions	mm
Tooth Radius r3	
Radius Width C	
Tooth Width B1	21.1
Tooth Width b1	
Tooth Width B2	72
Tooth Width B3	

Chain	mm
Pitch	38.1
Inside	25.4
Roller ø	25.4